

KAIZEN
TYRES



KAIZEN TYRES

APOLLO TYRES LTD.
7, Institutional Area, Sector - 32
Gurgaon - 122001, Haryana, India
Ph: +91-124-2721000 apollo tyres.com


PRODUCT CATALOGUE



KAIZEN TYRES ENDORSED BY APOLLO, THE LEADER IN INDIAN TYRE INDUSTRY

- Distinctively caters to different wants and needs of customers, keeping in mind dynamic nature of roads and loads
- Proven products, backed with technology and quality
- Launched in 1998, still going strong
- Well accepted internationally, sold in 10 + countries
- Tough, sincere and true value for money tyre

SEGMENTATION

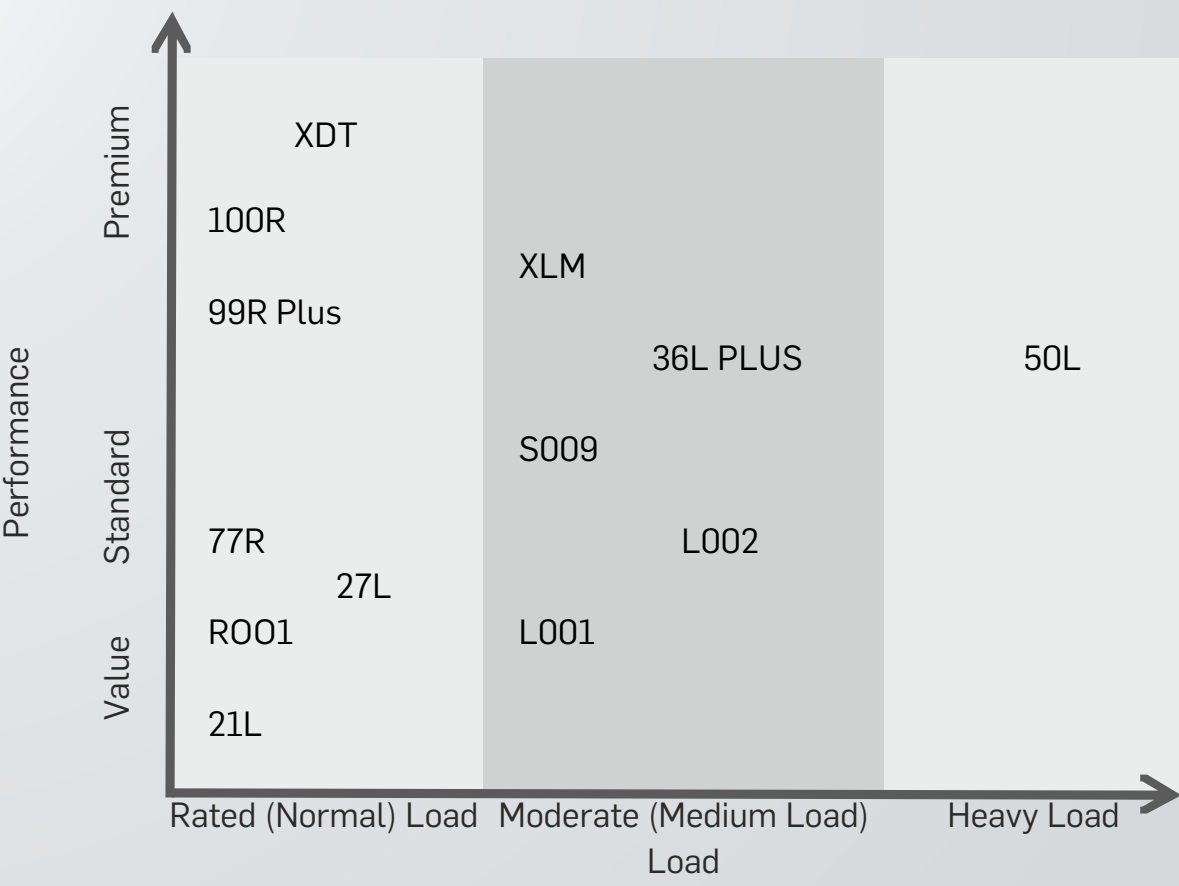

INDEX

KZ-100R	1
KZ-99R Plus	2
KZ-77R	3
KZ-R001	4
KZ-33R	5
KZ-XDT	6
KZ- 27L	7
KZ-21L	8
KZ-XLM	9
KZ-36L+	10
KZ-L001	11
KZ-L002	12
KZ-S009	13
KZ-32S	14
KZ- 50L	15

KZ-100R

PERFORMANCE - PREMIUM

- 5 Rib diamond cut tread design
- New shoulder design for cooler running and long-life



Application: Steer Axle for goods and all wheel fitment for passenger

Size	PR	Rim Width (Inch)	OD (mm)	SW (mm)	NSD (mm)	Load Index	Speed Symbol	Load Details (Single)	Load Details (Dual)
10.00-20	16	7.5	1082	284	18.5	146/142	J	3000Kg @ 795kPa	2630Kg @ 725kPa

KZ-99R Plus

PERFORMANCE - STANDARD

- Unique tread design
- Better distribution of rubber for long-life
- Multiple retread



Application: Steer Axle for goods and all wheel fitment for passenger

Size	PR	Rim Width (Inch)	OD (mm)	SW (mm)	NSD (mm)	Load Index	Speed Symbol	Load Details (Single)	Load Details (Dual)
10.00-20	16	7.5	1084	286	17.7	146/142	J	3000Kg @ 795kPa	2630Kg @ 725kPa
8.25-20	16	6.5	994	240	14.7	137/132	J	2300Kg @ 825kPa	2000Kg @ 760kPa

KZ-77R

PERFORMANCE - VALUE

- 5 rib design and strong casing for long-life



KZ-R001

PERFORMANCE - VALUE

- Designed for long haul applications and heavy loads



Application: Steer Axle for goods and all wheel fitment for passenger

Size	PR	Rim Width (Inch)	OD (mm)	SW (mm)	NSD (mm)	Load Index	Speed Symbol	Load Details (Single)	Load Details (Dual)
10.00-20	16	7.5	1082	287	17	146/142	J	3000Kg @ 795kPa	2630Kg @ 725kPa
9-00-20	16	7	1041	265	17	142/137	J	26500Kg @ 795kPa	2325Kg @ 725kPa

Application: Steer Axle for goods and all wheel fitment for passenger

Size	PR	Rim Width (Inch)	OD (mm)	SW (mm)	NSD (mm)	Load Index	Speed Symbol	Load Details (Single)	Load Details (Dual)
12-22-5	16	9.0	1084	292	16.1	150/145	K	3350Kg @ 790kPa	2900Kg @ 720kPa
12.00-20	18	8.5	1143	308	17	154/150	K	3750Kg @ 790kPa	3350Kg @ 720kPa
11.00-20	16	8.0	1084	292	16.1	150/145	K	3350Kg @ 790kPa	2900Kg @ 720kPa
11.00-20	18	8.0	1084	292	16.1	152/147	K	3550Kg @ 860kPa	3075Kg @ 790kPa
10.00-20	16	7.5	1062	280	15.5	146/142	K	3000Kg @ 795kPa	2630Kg @ 725kPa
9.00-20	16	7.0	1025	261	14.5	142/137	K	2650Kg @ 795kPa	2325Kg @ 725kPa

KZ-33R

PERFORMANCE - VALUE

- Designed for long haul applications



KZ-XDT

PERFORMANCE - PREMIUM

- Extra deep tread and strong casing for more mileage



Application: Steer Axle for goods and all wheel fitment for passenger

Size	PR	Rim Width (Inch)	OD (mm)	SW (mm)	NSD (mm)	Load Index	Speed Symbol	Load Details (Single)	Load Details (Dual)
8.25-20	14	6.5	990	240	14	136/131	J	2230Kg @ 795kPa	1960Kg @ 725kPa
8.25-20	16	6.5	990	240	14	137/132	J	2300Kg @ 825kPa	2000Kg @ 760kPa

Application: Rated / Normal load tyre for drive axle

Size	PR	Rim Width (Inch)	OD (mm)	SW (mm)	NSD (mm)	Load Index	Speed Symbol	Load Details (Single)	Load Details (Dual)
10.00-20	16	7.5	1083	279	24	146/142	J	3000Kg @ 795kPa	2630Kg @ 725kPa

KZ-27L

PERFORMANCE - VALUE

- U-lug design and wider center for optimum mileage



KZ-21L

PERFORMANCE - VALUE

- Open lug design and optimized tread mass for optimum mileage



Application: Rated / normal load tyre for drive, trailer and dummy axle

Size	PR	Rim Width (Inch)	OD (mm)	SW (mm)	NSD (mm)	Load Index	Speed Symbol	Load Details (Single)	Load Details (Dual)
10.00-20	16	7.5	1071	276	21	146/142	J	3000Kg @ 795kPa	2630Kg @ 725kPa

Application: Rated / normal load tyre for drive, trailer and dummy axle

Size	PR	Rim Width (Inch)	OD (mm)	SW (mm)	NSD (mm)	Load Index	Speed Symbol	Load Details (Single)	Load Details (Dual)
10.00-20	16	7.5	1070	279	20.5	146/142	J	3000Kg @ 795kPa	2630Kg @ 725kPa

KZ-XLM

PERFORMANCE - PREMIUM

- Optimized tread mass distribution
- High-contained air volume for mileage and load carrying



Application: Moderate / Medium load tyre for drive axle

Size	PR	Rim Width (Inch)	OD (mm)	SW (mm)	NSD (mm)	Load Index	Speed Symbol	Load Details (Single)	Load Details (Dual)
*10.00-20	16	7.5	1073	282	22.2	146/142	J	3000Kg @ 795kPa	2630Kg @ 725kPa
8.25-20	16	6.5	1002	244	21.4	137/132	J	2300Kg @ 825kPa	2000Kg @ 760kPa

* Export special

KZ-36L+

PERFORMANCE - STANDARD

- Cross and wider lug with strong casing for uniform wear and long life



Application: Moderate / Medium load tyre for drive axle

Size	PR	Rim Width (Inch)	OD (mm)	SW (mm)	NSD (mm)	Load Index	Speed Symbol	Load Details (Single)	Load Details (Dual)
10.00-20	16	7.5	1070	277	21	146/142	J	3000Kg @ 795kPa	2630Kg @ 725kPa

KZ-L001

PERFORMANCE - VALUE

- U-Lug design for multi-purpose application



KZ-L002

PERFORMANCE - STANDARD

- Pyramidal lug with strong casing for uniform wear and long-life



Application: Rated / Normal load tyre for drive axle

Size	PR	Rim Width (Inch)	OD (mm)	SW (mm)	NSD (mm)	Load Index	Speed Symbol	Load Details (Single)	Load Details (Dual)
11-00-20	16	8	1080	290	19.4	150/145	K	3350Kg (7390 lbs) @790Kg (115 psi)	2900Kg (6395 lbs) @720kpa (105psi)
11.00-20	18	8	1080	290	19.4	152/147	K	3550Kg (7830 lbs) @860Kg (125 psi)	3075Kg (6780 lbs) @790kpa (115 psi)

Application: Moderate / Medium load tyre for drive axle

Size	PR	Rim Width (Inch)	OD (mm)	SW (mm)	NSD (mm)	Load Index	Speed Symbol	Load Details (Single)	Load Details (Dual)
12.00-20	18	8.5	1141	310	22	154/150	K	3750Kg (8270 lbs) @ 790kPa (115 psi)	3350Kg (7390 lbs) @ 720kPa (105 psi)

KZ-S009

PERFORMANCE - STANDARD

- Wide tread design and reinforced casing for longer life



Application: Semi-lug pattern for all wheel application

Size	PR	Rim Width (Inch)	OD (mm)	SW (mm)	NSD (mm)	Load Index	Speed Symbol	Load Details (Single)	Load Details (Dual)
12.00-24	20	8.5	1240	316	20.3	160/155	K	4500Kg (9920 lbs) @ 86kPa (125 psi)	3875Kg (8540 lbs) @ 790kPa (115 psi)

KZ-32S

PERFORMANCE - STANDARD

- Rib & Lug design for high traction
- Cut and chip resistant compound for longer life



Application: All-wheel position tyre for hilly terrain

Size	PR	Rim Width (Inch)	OD (mm)	SW (mm)	NSD (mm)	Load Index	Speed Symbol	Load Details (Single)	Load Details (Dual)
9.00-20	16	7	1050	263	20	142/137	J	2650Kg @ 795kPa	2325Kg @ 725kPa

KZ-50L

PERFORMANCE - STANDARD

- Strong casing and bead construction for heavy load application



NOTES

Application: Heavy load drive tyre

Size	PR	Rim Width (Inch)	OD (mm)	SW (mm)	NSD (mm)	Load Index	Speed Symbol	Load Details (Single)	Load Details (Dual)
10.00-20	18	7.5	1079	277	22	147/143	G	3080Kg @ 825kPa	2700Kg @ 760kPa

NOTES

NOTES